


B

B

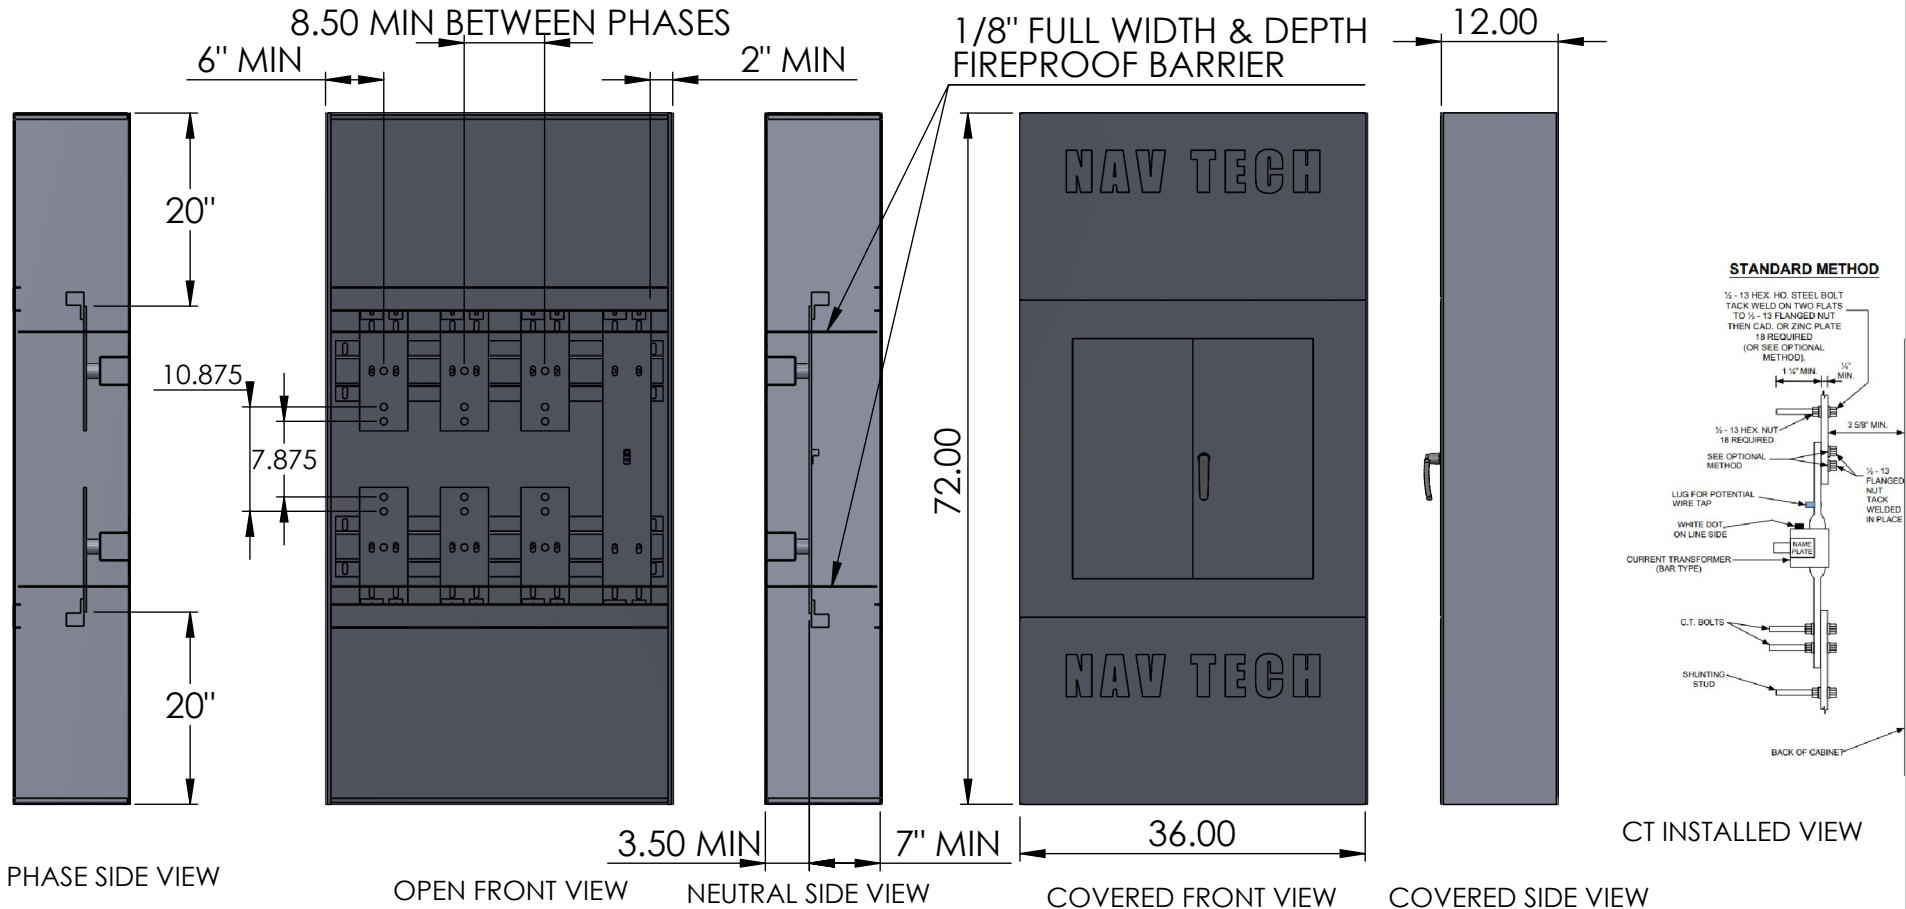

## NOTES:

1. NEMA 1 CONSTRUCTION INCLUDES STITCH WELDED SCREW FASTENED ENCLOSURE
2. BUS BARS - COPPER 98% CONDUCTIVITY
3. ENCLOSURE WILL DISPLAY MANUFACTURERS NAME
4. ALL NUTS, BOLTS AND WASHERS MUST BE 1/2-13 ZINC COATED GRADE 5 STEEL
5. MAX WIRE SIZE LINE AND LOAD SIDE: (2)600 MCM OR (4) 250 MCM LEADS (MINIMUM WIRE SIZE:#4)
6. FRONT DOOR IS OUTFITTED WITH SEALABLE SCREWS & PADLOCKABLE PROVISIONS
7. DESIGNED FOR EITHER LINE TOP/LOAD BOTTOM CABLE ENTRY OR LOAD TOP/LINE BOTTOM CABLE ENTRY

	NAME	DATE
DRAWN BY	N.BOSETTI	5/2/2024
APPROVED BY		

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Nav-Tech Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Nav-Tech Inc. IS PROHIBITED.



155 MARCUS BLVD  
HAUPPAUGE, NEW YORK 11788  
PH: (718) 257-2111 FAX: (718) 257-2626

**UNLESS OTHERWISE SPECIFIED:**  
ALL DIMENSIONS ARE NOMINAL UNLESS EXPLICITLY STATED OTHERWISE

MAT'L: 12 GA GALV  
FINISH: POWDER COAT ANSI 61 GY  
WEIGHT: N/A

**UNLESS OTHERWISE SPECIFIED**

1. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES .015 X 45° OR .015R
2. DIMENSIONAL LIMITS APPLY AFTER PLATING
3. 125/ MACHINED SURFACES EXCEPT AS NOTED

DRAWING TITLE:		298CT N1 SPEC SHEET			
PART #:		NAV-298CT-800			
DESCRIPTION:		NEMA 1 298 CT CABINET 800 AMP SPECIFIED TO CON ED MES 298			
<b>DO NOT SCALE DRAWING</b>		SCALE	1:10	SIZE	A
		SHEET	1 OF 1	REV.	3

A

A

2

1