Weatherproof Hinge Cover Box Type 4X Outdoor DSE Style

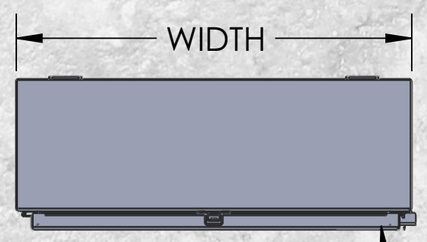

TOP VIEW

NOTES:

1. BOX AND COVER CONSTRUCTION- GALVANNEALED STEEL, ALUMINUM OR STAINLESS STEEL (CODE GA)
2. FINISH: ANSI 61 WRINKLE GREY POWDER COAT FOR STEEL ENCLOSURES,
   MILL BRUSHED FINISH FOR ALUMINUM AND STAINLESS ENCLOSURES
3. CLOSED CELL FOAM GASKETED COVER
3. STANDARD EXTRUDED ROLLED LIP AROUND PERIMETER OF BOX OPENING
4. STAINLESS STEEL CLAMP ASSEMBLIES ON 3 SIDES OF THE BOX EVERY 8.00" WHERE SPACE ALLOWS
5. OPTIONAL MOUNTING STUDS AND BACKPANELS AVAILABLE BY REQUEST
6. FACTORY GROUND STUD AND COVER BONDING STUD STANDARD
7. PADLOCKABLE BY REQUEST

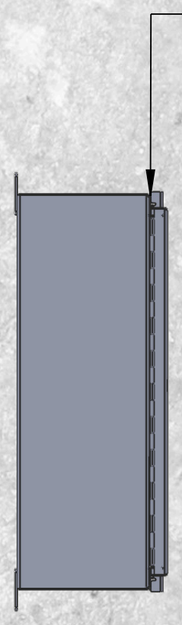

LEFT SIDE VIEW

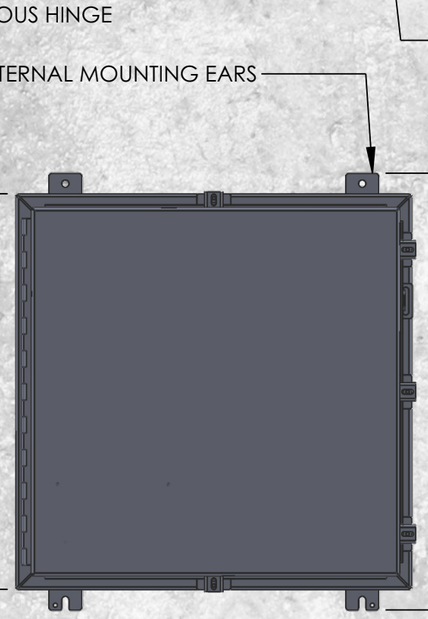

FRONT VIEW

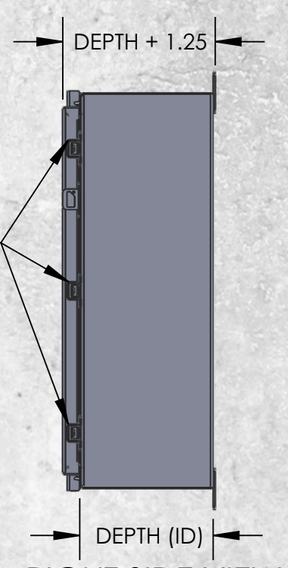

RIGHT SIDE VIEW

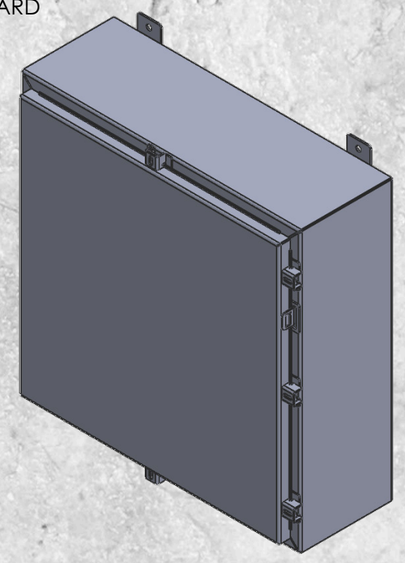

E160783 UL LISTED

BOXES, JUNCTION & PULL

LOT NO. XXXXXX

NAV-TECH INC.

HAUPPAUGE, NEW YORK

***Stainless steel or aluminum available upon request**
***Additional sizes available upon request**
***Part number: wphcbx(HHWWDD)-ss(304 or 316); Use height, width, depth for (HHWWDD). Use suffix-BP for enclosures with back plate**

Features

- Enclosure and cover are manufactured from 16, 14, or 12 gauge stainless steel in accordance with UL Standards.
- Stainless steel external screw clamps on three sides.
- Stainless steel continuous hinge.
- All seams continuously welded and ground smooth.
- Rolled lip around three sides of door and all sides of door and all sides of door opening for watertight seal.
- Neoprene gasket attached to door with oil resistant adhesive.
- Clamps on thee sides of door for watertight seal.
- Stainless steel external hardware.
- Hasp and staple provided for padlocking.
- External mounting feet.
- Collar studs for mounting optional panel available upon request.
- Mill brushed finish is standard.

Application

- Designed to protect wiring in outdoor installations against rain, sleet, or snow, or indoors against dripping water.
- Degree of protection against corrosion.
- Protection against hose directed water

- NEMA Type 4X
- UL 50
- 50E Listed