


TOP VIEW




NOTES:

1. NEMA 3R CONSTRUCTION WITH SHED ROOF - GALV SHEET STEEL (12GA).
2. FINISH: POWDERCOAT GRAY ENAMEL.
3. BUS BARS- COPPER 98% CONDUCTIVITY.
4. TERMINALS INCLUDED - SEE CHART FOR # OF SETS.
5. LOCKABLE IN "OFF" POSITION STANDARD - LOCKABLE IN "ON" AVAILABLE BY REQUEST.
6. ISOLATED NEUTRAL BUS WITH REMOVABLE LINK IN CENTER AVAILABLE BY REQUEST.
7. PADMOUNT AVAILABLE IS STANDARD - MOUNTING TABS AVAILABLE BY REQUEST.

LEFT SIDE HINGED HANDLE COVER

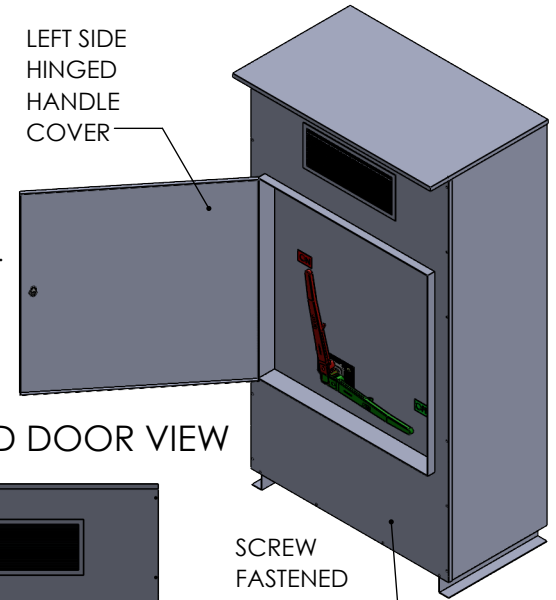

OPENED DOOR VIEW

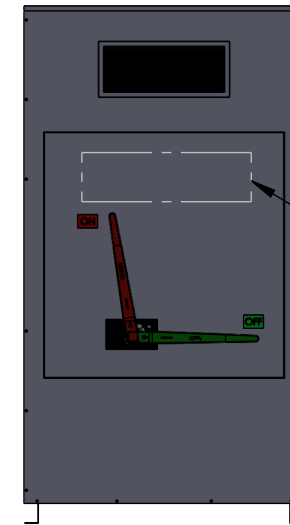


SCREW FASTENED MAIN COVER


OPTIONAL VIEWING WINDOW (NON STANDARD)

B


B

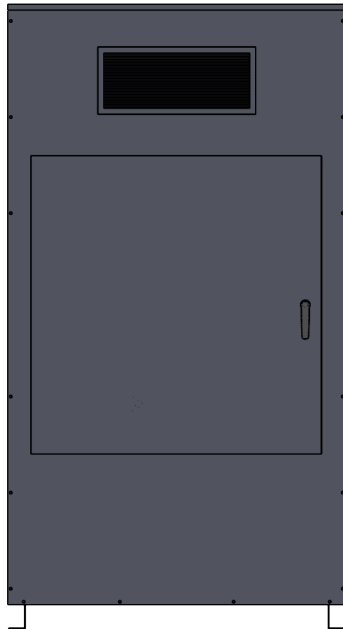

FRONT COVERED VIEW

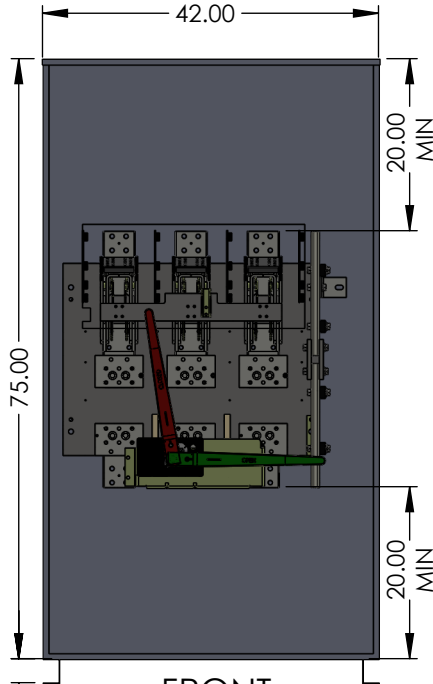

FRONT OPENED VIEW

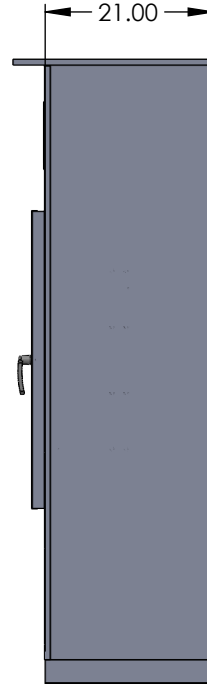

SIDE VIEW

A

A

PART #	AMPS	MAX VOLTS	FEED	SWITCH	LUGS
3000BPS-T-N3R	3000A	600V	TOP	VL4612N	8 SETS 600MCM
3000BPS-B-N3R	3000A	480V	BOTTOM	VLB4412N	8 SETS 600MCM
4000BPS-T-N3R	4000A	600V	TOP	SL4613N	10 SETS 600MCM
4000BPS-B-N3R	4000A	480V	BOTTOM	SLB4413N	10 SETS 600MCM

DRAWN BY	NAME	DATE
	N. BOSETTI	2/11/2025
REVIEWED BY		



155 MARCUS BLVD  
HAUPPAUGE, NEW YORK 11788  
PH: (718) 257-2111 FAX: (718) 257-2626

MAT'L: 12 GAUGE GALV STEEL  
FINISH: GRAY POWDER COAT ANSI 61  
WEIGHT:

ALL DIMENSIONS ARE NOMINAL UNLESS EXPLICITLY STATED OTHERWISE

DRAWING TITLE: 3000A-4000A N3R ENCLOSED BPS

PART #: XXXXBPS-X-N3R

**DO NOT SCALE DRAWING**

DESCRIPTION: NEMA 3R ENCLOSED BOLTED PRESSURE SWITCH 3P/4W RATINGS: 3000A-4000A 200K AIC MAX

SCALE:	1:50	SIZE	A	SHEET	1 OF 1	REV.	1
--------	------	------	---	-------	--------	------	---